

## EE872

## Modular Probe for CO<sub>2</sub>, Humidity, Temperature and Ambient Pressure

The EE872 probe, with a measurement range up to 5 % CO<sub>2</sub> (50 000 ppm), is suitable for use in harsh and demanding environment in agriculture, life stock barns, hatchers, incubators, green houses or outdoors.

### Outstanding Accuracy

A multi-point CO<sub>2</sub> and temperature (T) adjustment procedure leads to excellent CO<sub>2</sub> measurement accuracy over the entire T working range of -40...60 °C (-40...140 °F), which is ideal for agriculture or outdoor use.

### Long Term Stability

EE872 incorporates the E+E dual wavelength NDIR CO<sub>2</sub> sensor, which automatically compensates for ageing effects and is highly insensitive to pollution. The RH sensing element with E+E proprietary coating is suitable even for aggressive and corrosive environment.

### Pressure and Temperature Compensation

The active compensation with on-board sensors leads to best CO<sub>2</sub> measurement accuracy independently of temperature, altitude or weather conditions.

### 4 in 1

Beside CO<sub>2</sub>, the EE872 measures also relative humidity (RH), temperature and ambient pressure (p). Additionally, the devices calculated also the dew point temperature (Td).

### Reliable in Harsh and Condensing Environment

The heated version of EE872 is suitable for high humidity and condensing environment. The IP65 enclosure and the replaceable filter offer excellent protection in polluted environment. With a special filter cap, the EE872 is also appropriate for applications with periodical H<sub>2</sub>O<sub>2</sub> sterilization.

### Analogue Output or RS485 Interface

The CO<sub>2</sub> measured data is available simultaneously on the analogue voltage and current outputs. Depending on the EE872 version, the RS485 interface with Modbus RTU protocol offers also the RH, T, p, or Td data.

### User Configurable and Adjustable

The free EE-PCS Product Configuration Software together with an optional adapter cable facilitates the configuration and adjustment of the EE872.




## Features

### Interchangeable Sensing Module

- » E+E dual wavelength NDIR, auto-calibration
- » T and p compensation with on-board sensors
- » Heated versions for preventing condensation
- » RH sensing element protected by E+E coating
- » T range -40...60 °C (-40...140 °F)
- » User configurable and adjustable

### Filter Cap

- » PTFE
- » Catalytic for H<sub>2</sub>O<sub>2</sub> sterilisation
- » Replaceable

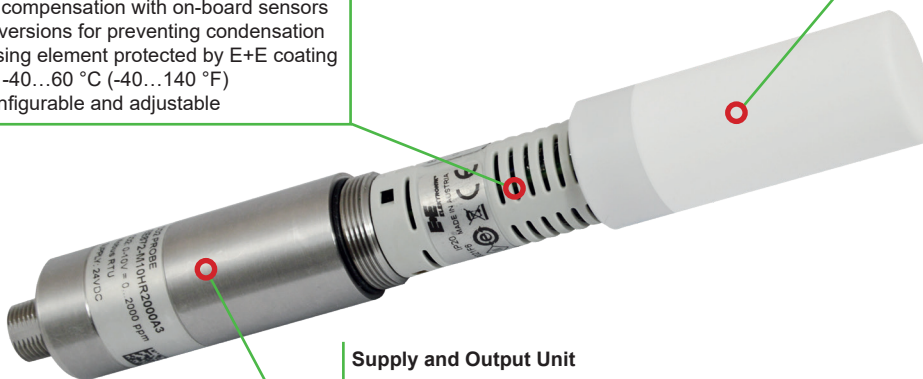

### Supply and Output Unit

- » CO<sub>2</sub> voltage and current output
- » Modbus RTU (CO<sub>2</sub>, T, RH, p, Td)
- » IP65 protection class
- » Stainless steel or plastic enclosure
- » M12 stainless steel connector
- » User configurable

### Test Report

- » According DIN EN 10204 - 2.2

## Technical Data

### Measurands

<b>CO<sub>2</sub></b>	
Measurement principle	Dual wavelength non dispersive infrared (NDIR)
Measurement range	0...2000 ppm: < ± (50 ppm + 2 % mv) <i>mv = CO<sub>2</sub> measured value</i>
Accuracy at 25 °C (77 °F) and 1013 mbar (14,69 psi)	0...5000 ppm: < ± (50 ppm + 3 % mv) 0...10000 ppm: < ± (100 ppm + 5 % mv)
	0...3 %: < ± (1.5 % from full scale + 2 % mv) 0...5 %:
Response time $t_{63}$ <sup>1)</sup>	90 s
T dependency, typ. (-20...45 °C) (-4...113 °F)	± (1 + mv [ppm] / 1000) ppm/°C, for CO <sub>2</sub> < 10000 ppm -0.3 % mv / °C, for CO <sub>2</sub> > 10000 ppm
Residual pressure dependency <sup>2)</sup> (-20...45 °C) (-4...113 °F)	0.014 % mv / mbar (ref. to 1013 mbar)
Measurement interval	15 s (user adjustable from 15 s to 1 h)
Long term stability, typ. at 0 ppm CO <sub>2</sub>	20 ppm / year

### Relative humidity

Working range	0...100 % RH, with enabled heating 0...95 % RH (non condensing), with disabled heating
Accuracy <sup>3)</sup> at 25 °C (77 °F)	± 3 % RH (20...80% RH) ± 5 % RH (0...95% RH)

### Pressure

Working range	700...1100 mbar (10.15...15.95 psi)
Accuracy at 25 °C (77 °F), typ.	± 2 mbar
Temperature dependency	± 0.016mbar/K, 0...60 °C (0...140 °F)

### Temperature

Working range	-40...60 °C (-40...140 °F)
Accuracy <sup>3)</sup> 5...60 °C (41...140 °F), typ.	± 0.5 °C (± 0.9 °F)

### Outputs

<b>Analogue (CO<sub>2</sub> only)</b>	0 - 5 V / 0 - 10 V 0 - 20 mA / 4 - 20 mA (3-wire)	-1 mA < Load current < 1 mA Load resistance ≤ 500 Ohm
<b>Digital interface (CO<sub>2</sub>, RH, T, p, Td)</b>	RS485, max. 32 unit load devices on one bus (EE872 = 1/10 unit load)	
Protocol	Modbus RTU	


### General

Supply voltage	15 - 35 V DC for current output 12 - 30 V DC for voltage output and RS485 interface
Average current consumption at 12 V DC and 15 s measurement interval	45 mA for 20 mA output current 25 mA for voltage output and RS485 interface
Peak current	max. 200 mA
Enclosure material	plastic (PET), UL94HB approved or stainless steel 1.4404
Filter cap material	PTFE, UL94V-0 approved
Protection class	IP65
Electrical connection	M12 x 1, stainless steel 1.4404
Electromagnetic compatibility (Industrial environment)	EN61326-1 EN61326-2-3
Storage conditions	-40...60 °C (-40...140 °F) 700...1100 mbar (10.15...15.95 psi) 0...95 % RH non condensing



1) With data averaging algorithm for smooth output signal. Faster response time available upon request.  
2) The pressure dependency of a device without pressure compensation: 0.14 % mv / mbar.  
3) At 24 V DC supply, air flow min. 0.3 m/s, probe horizontal or with sensing head downwards, excl. hysteresis.

## Dimensions (mm/inch)

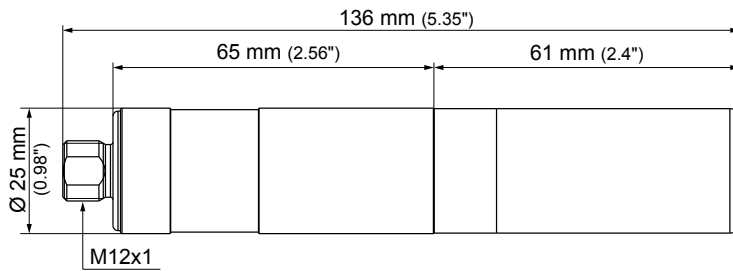

## Ordering Guide

		EE872-	
Hardware Configuration	Model	CO <sub>2</sub> (default: heated) CO <sub>2</sub> + p (default: heated) CO <sub>2</sub> + T + RH + p (default: not heated)	M10 M15 M13
	CO <sub>2</sub> range	0...2000 ppm 0...5000 ppm 0...1 % (10000 ppm) 0...3 % (30000 ppm) 0...5 % (50000 ppm)	HV1 HV2 HV3 HV5 HV6
	Probe material	plastic stainless steel	no code PM2
	Filter	PTFE Catalytic for H <sub>2</sub> O <sub>2</sub> sterilisation	no code F12
Software Setup	Output	output 1: 0-10 V    output 2: 4-20 mA output 1: 0-5 V    output 2: 0-20 mA Modbus RTU <sup>1)</sup>	GA7 GA11 P1 P1

1) Factory setting: baud rate 9600, parity even, stop bits 1.  
 Modbus Map and communication setting: See User Guide and Modbus Application Note at [www.epluse.com/ee872](http://www.epluse.com/ee872)

## Ordering Examples

### EE872-M10HV1GA7

Model: CO<sub>2</sub>  
 CO<sub>2</sub> range: 2000 ppm  
 Probe material: plastic  
 Filter: PTFE  
 Output: 0-10 V  
 4-20 mA

### EE872-M13HV6PM2F12P1

Model: CO<sub>2</sub> + RH + T + p  
 CO<sub>2</sub> range: 0...5 %  
 Probe material: stainless steel  
 Filter: H<sub>2</sub>O<sub>2</sub>  
 Output: Modbus RTU  
 Baud rate: 9600  
 Parity: even  
 Stop bits: 1

## Ordering Guide EE872S Sensing Module (Spare Part)

		EE872S-
<b>Model</b>	CO <sub>2</sub> (default: heated)	M10
	CO <sub>2</sub> + p (default: heated)	M15
	CO <sub>2</sub> + T + RH + p (default: not heated)	M13
<b>CO<sub>2</sub> range<sup>1)</sup></b>	0...2000 ppm	HV1
	0...5000 ppm	HV2
	0...1 % (10000 ppm)	HV3
	0...3 % (30000 ppm)	HV5
	0...5 % (50000 ppm)	HV6

1) The CO<sub>2</sub> range of the EE872S must be the same as of the original EE872 probe.

## Ordering Example Sensing Module

### EE872S-M15HV1

Model: CO<sub>2</sub> + p  
 CO<sub>2</sub> range: 2000 ppm

## Accessories (For further information see data sheet "Accessories")

Mounting flange	HA010226
Wall mounting clip Ø 25 mm	HA010227
Radiation shield	HA010510
M12x1 flanged coupling with 50 mm (1.97") stranded wire	HA010705
Modbus configuration adapter	HA011018
E+E Product Configuration Software (Download: <a href="http://www.epluse.com/Configurator">www.epluse.com/Configurator</a> )	EE-PCS
Connection cable M12 - flying leads (1.5 m (59.06") / 5 m (196.85") / 10 m (393.70"))	HA010819/20/21
T-coupler M12 - M12	HA030204
M12 cable connector for self assembly	HA010707
Protection cap / calibration adapter	HA010785
Protection cap for the M12 cable socket	HA010781
Protection cap for the M12 plug of EE872	HA010782